



A2-36S Series

36 Watts Switching Adapter

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 260g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



SPECIFICATION

| Item | Model | A2-36S12R |
|--------------------------|-------|-----------------------------|
| Output Voltage | | 12~17V |
| Output Rating | | 36W Max |
| Input Voltage | | AC 90~264V |
| Input Frequency | | 47~63Hz |
| Input Current | | 1.2A Maximum |
| Inrush Current | | 60A Maximum |
| Line Regulation | | 2% Maximum |
| Load Regulation | | ±5% |
| Ripple & Noise | | 1% Maximum |
| Efficiency | | 84% Typical |
| Temperature Coefficient | | 0.05%/°C |
| Over-Voltage Protection | | Auto Recovery |
| Short-circuit Protection | | Auto Recovery |
| Operating Temperature | | 0~40°C |
| Storage Temperature | | -20~85°C |
| Safety Description | | UL, CUL, TUV, CB, BSMI, PSE |
| EMC (EMI/EMS) | | BSMI |

(*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

| | |
|-----------------------------------|----------------------------------|
| Tel:+86-20-81628973 | Fax:+86-20-81628967 |
| e-mail:sales@ceetus.com.cn | Website:www.ceetus.com.cn |



ORDERING INFORMATION

A2-36S12-U-A3

Output Plug List


Mechanical

Output Voltage: 12 --- 12.0V
135 --- 13.5V


Output Watts

MECHANICAL




U



V



W

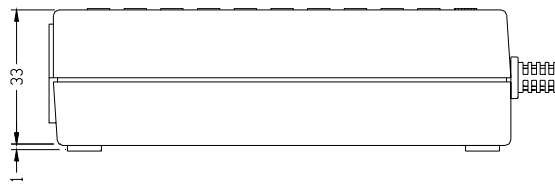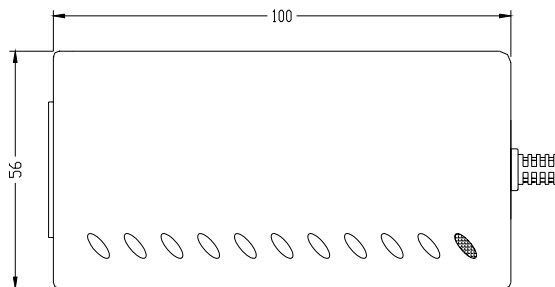

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1200mm

Tel: +86-20-81628973

e-mail: sales@ceetus.com.cn

Fax: +86-20-81628967

Website: www.ceetus.com.cn



A2-36SG Series

36 Watts Switching Adapter

FEATURES

- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 260g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



SPECIFICATION

| Model | A2-36SG12R |
|--------------------------|--------------------------------|
| Item | A2-36SG12R |
| Output Voltage | 12~17V |
| Output Rating | 36W Max |
| Input Voltage | AC 90~264V |
| Input Frequency | 47~63Hz |
| Input Current | 1.2A Maximum |
| Inrush Current | 60A Maximum |
| Line Regulation | 2% Maximum |
| Load Regulation | ±5% |
| Ripple & Noise | 1% Maximum |
| Efficiency | 84% Typical |
| Temperature Coefficient | 0.05%/°C |
| Over-Voltage Protection | Auto Recovery |
| Short-circuit Protection | Auto Recovery |
| Operating Temperature | 0~40°C |
| Storage Temperature | -20~85°C |
| Safety | I/P (UL, CUL, TUV, CB, BSMI) |
| EMC (EMI/EMS) | I/P (CE, BSMI) |

(*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

| | |
|-----------------------------------|----------------------------------|
| Tel:+86-20-81628973 | Fax:+86-20-81628967 |
| e-mail:sales@ceetus.com.cn | Website:www.ceetus.com.cn |



ORDERING INFORMATION

A2-36SG12-U-A3

Output Plug List


Mechanical

Output Voltage: 12 --- 12.0V
135 --- 13.5V


Output Watts

MECHANICAL




U



V



W

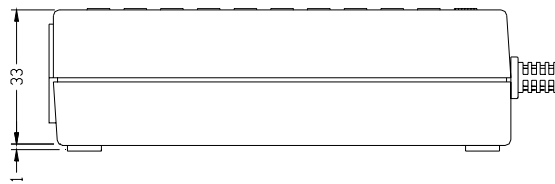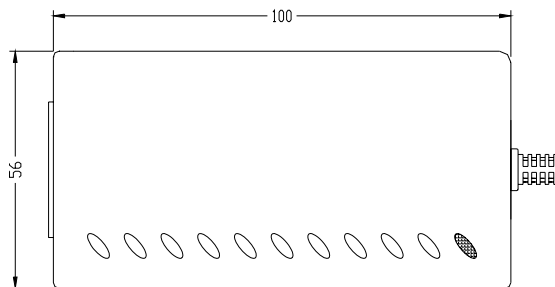

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1200mm

Tel: +86-20-81628973

e-mail: sales@ceetus.com.cn

Fax: +86-20-81628967

Website: www.ceetus.com.cn